
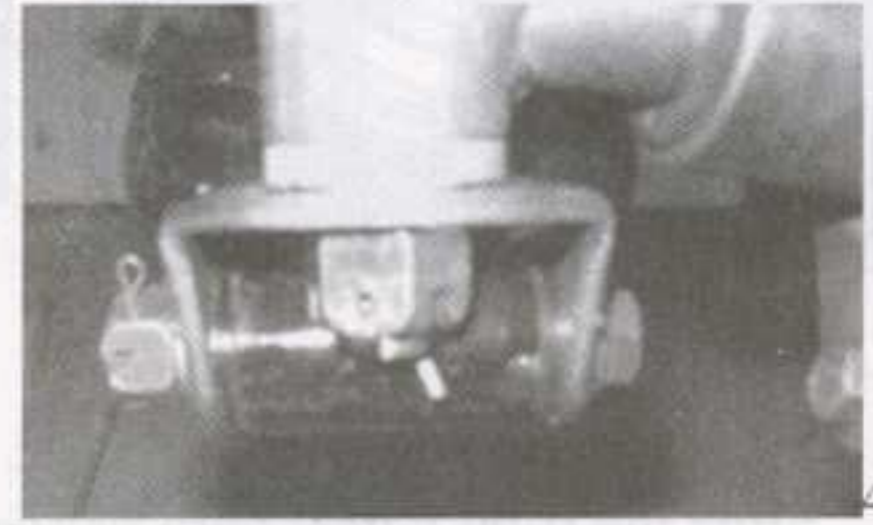


Assemble Manual

ITEM NO.: ATV-59Q

PART ONE — ASSEMBLE TRIFURCATE FIXING SHAFT

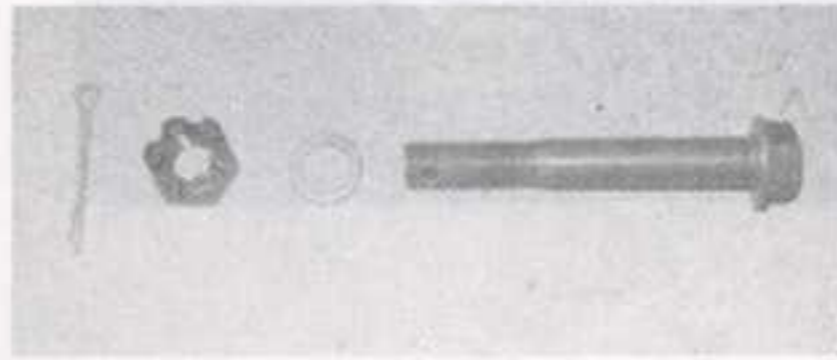

1. The trifurcate fixing shaft are fixed on the lower swing arms;
2. The uninstalled split pin, lock nut, plane washer, hex flange bolt;
3. Secure the trifurcate shaft with hex flange bolt and lock nut;
4. Use the split pin to fix the lock nut.

PART TWO — ASSEMBLE TURNING SHAFT



1. The turning shaft are fixed in the trifurcate shaft;
2. Secure the turning shaft with lock nut;
3. Use the split pin to fix the lock nut.

PART THREE — ASSEMBLE LEFT & RIGHT FRONT WHEEL






4




5

1. Loose the nuts and bolts;
2. Slide the left wheel onto flange, the pattern of tire should be adjusted as arrow direction;
3. Slide the right wheel onto flange, the pattern of tire should be adjusted as arrow direction;
4. Secure the wheel with nuts and bolts;
5. Put the dustproof on the flange washer.

PART FOUR — ASSEMBLE RIGHTT REAR WHEEL

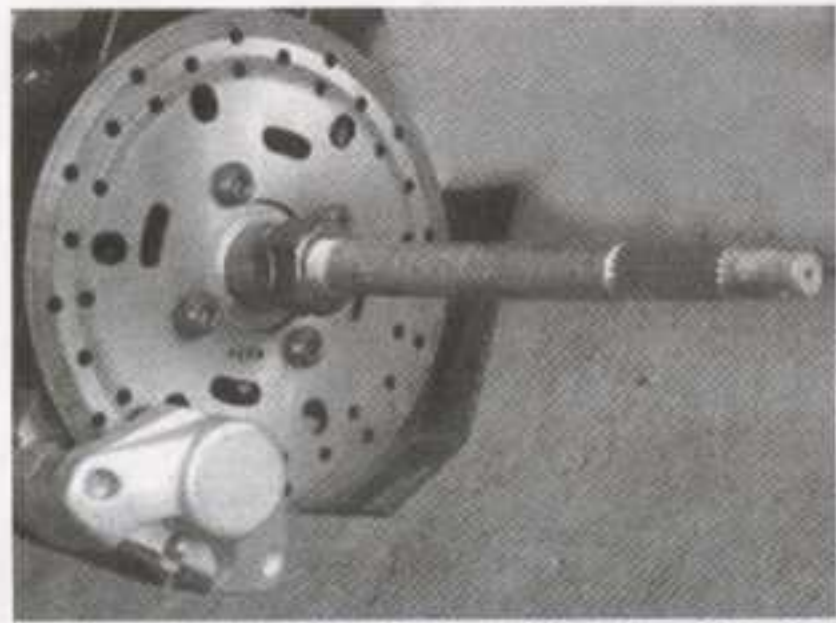

1

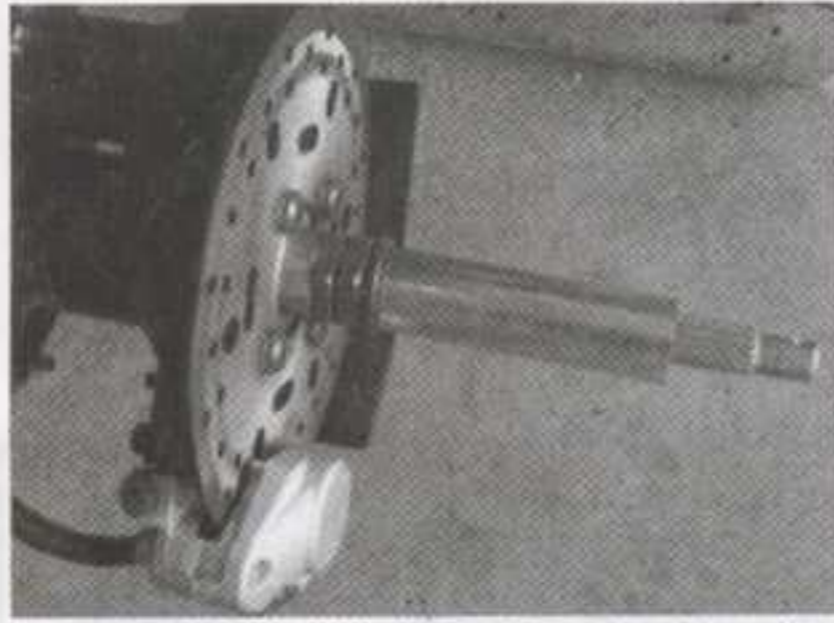

2



3



4





5



6


1. The right of rear axes;
2. Put the O-shape ring and the spacer onto the right of axes;
3. Slide the right wheel onto the right of axles, the pattern of tire should be adjusted as arrow direction;
4. Put the flange washer onto the rear axes, secure the wheel with lock nuts
5. Use the split pin to fix the lock nut;
6. Put the dustproof on the flange washer.

PART FIVE — ASSEMBLE LEFT REAR WHEEL

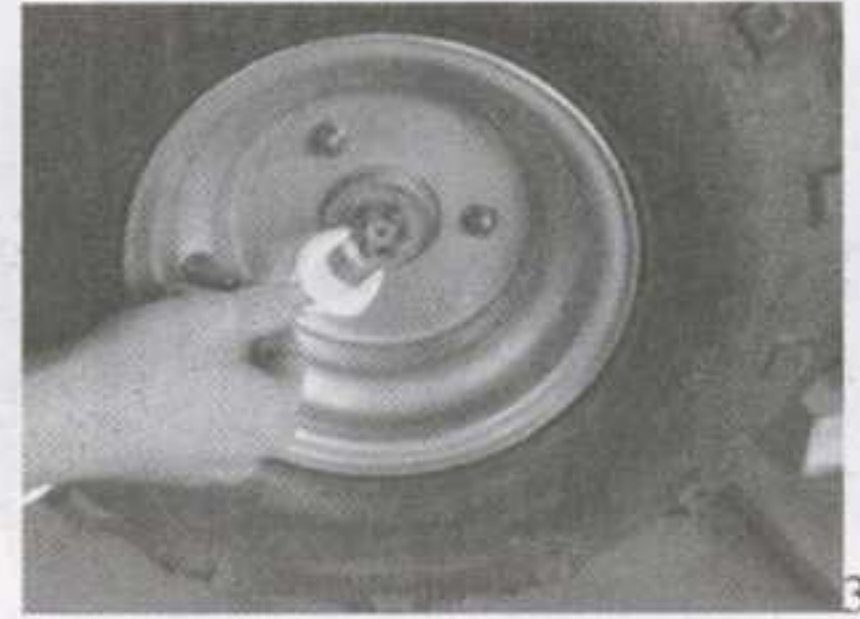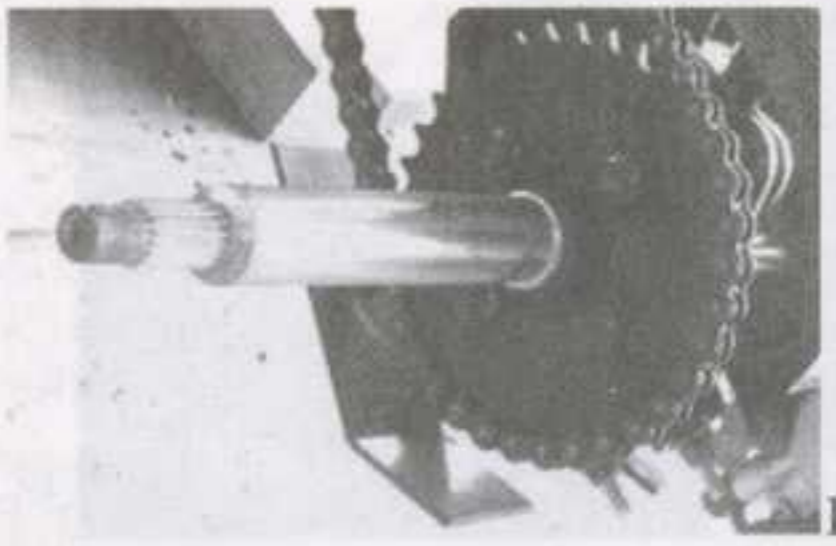

1. The left of rear axes;
2. Slide the left wheel onto the left of axles, the pattern of tire should be adjusted as arrow direction;
3. Put the flange washer onto the rear axes, secure the wheel with lock nuts
4. Use the split pin to fix the lock nut;
5. Put the dustproof on the flange washer.

PART SIX — ASSEMBLE STEERING HANDLE BAR AND SPEEDOMETER

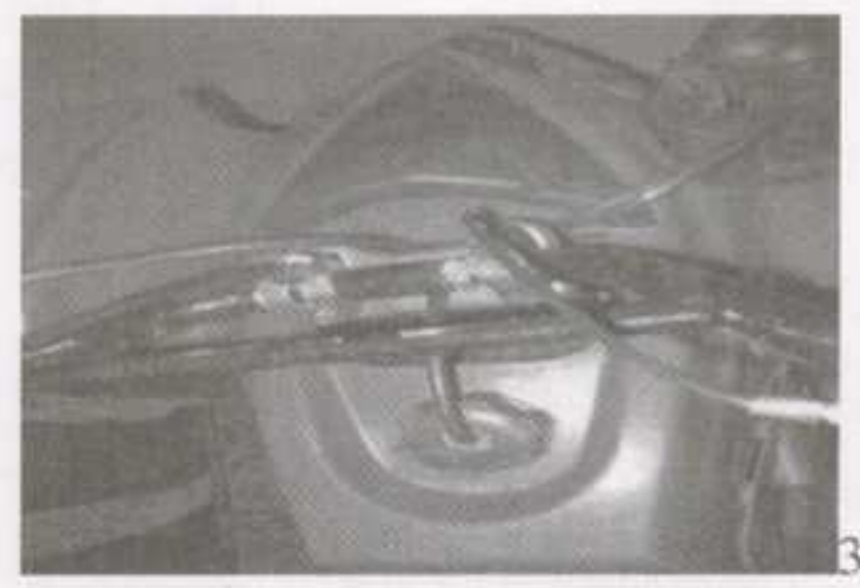

1. Every item is dismantled;
2. Place the lower holders ;
3. Put up the steering handle bar and place the pattern part in the middle;
4. Place the upper holders;
5. Place the bracket for fixing the speedometer on the upper holders;
6. Fasten the bolts.

PART SEVEN — ASSEMBLE FRONT BUMPER



1. Every item is dismantled;
2. Put the bumper onto the front of main frame;
3. Secure the bumper with nuts and bolts.

