


STEP 1: FIX THE TURNING SHAFT

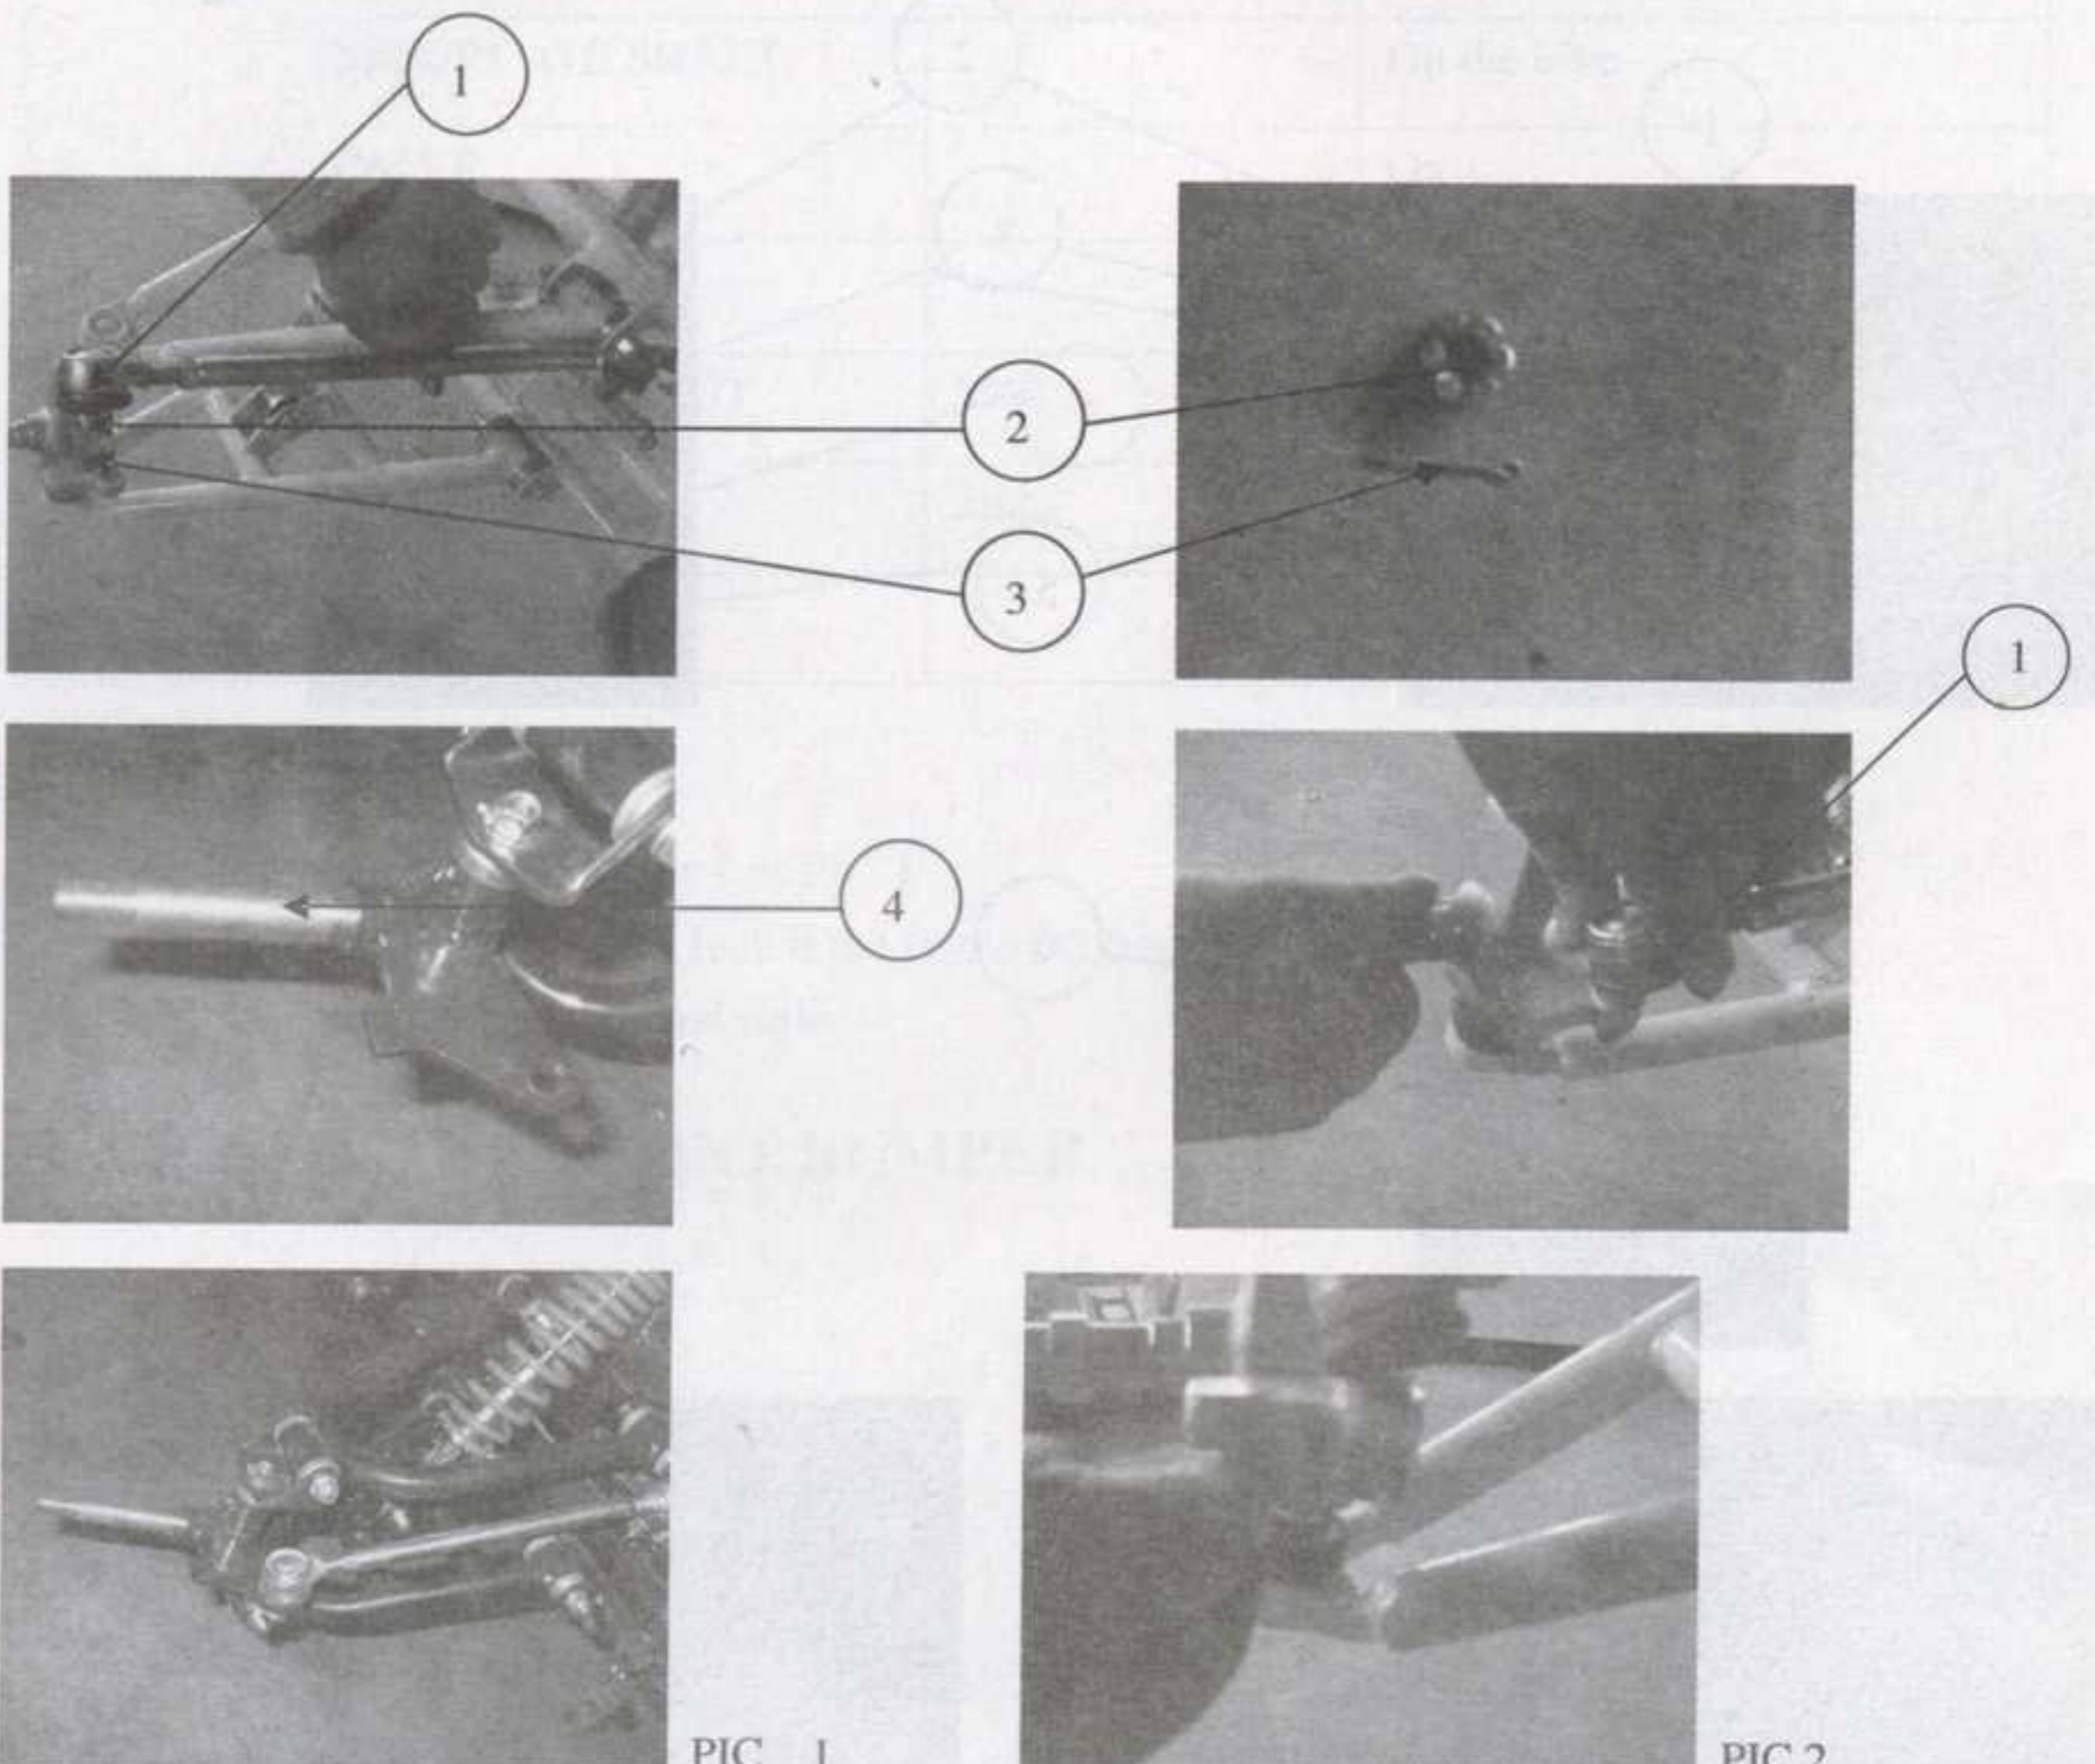







PIC 1

PIC 2

NO	DESCRIPTION	SIZE	REMARK
1	TURNING SHAFT		On the bike
2	HEX CONCAVE NUT	M10	On 1
3	SPLIT PIN	2MM	On 1
4	TRIFURCATE SHAFT		On the bike

1. Take off 2 and 3 from 1
2. Put 1 go through up to down
3. Use 2 lock it, as PIC 1
4. And then put 3, orientation it, as PIC 2
5. The same operate of right and left




STEP 2: FIX THE LEFT AND RIGHT FRONT WHEEL

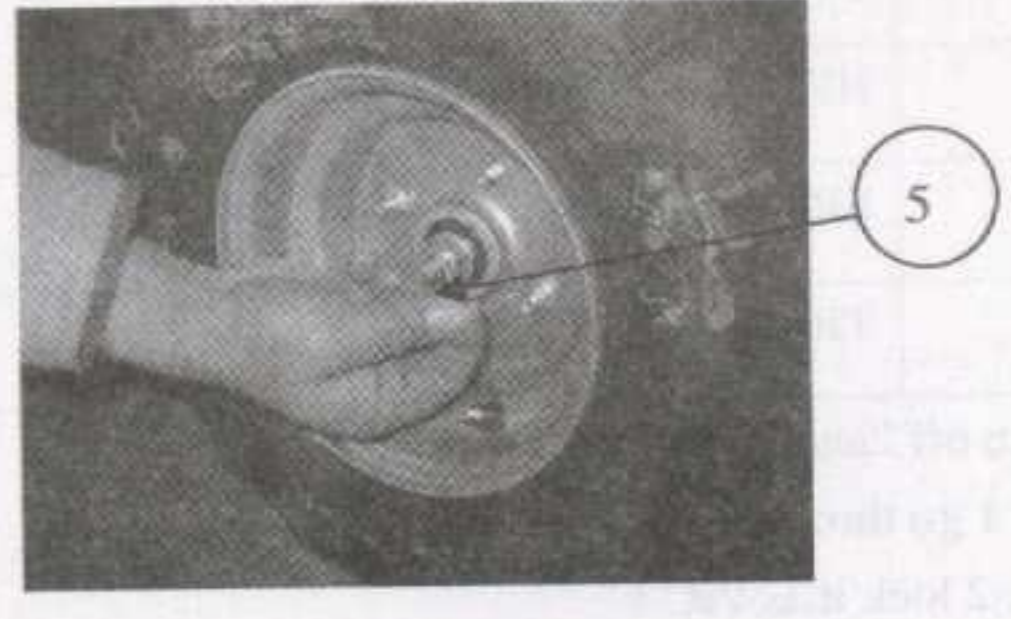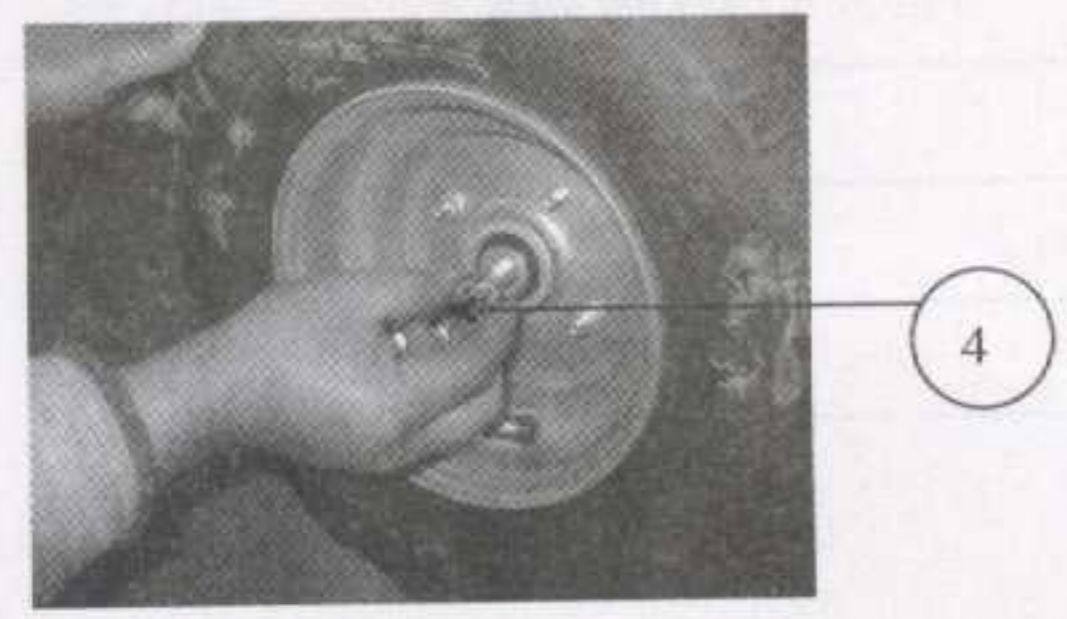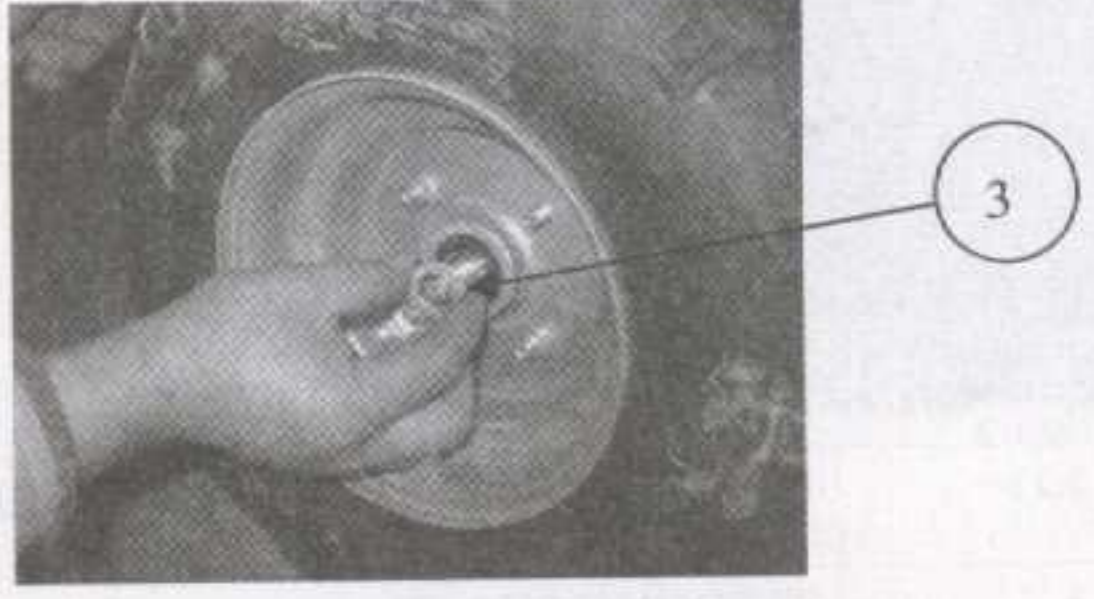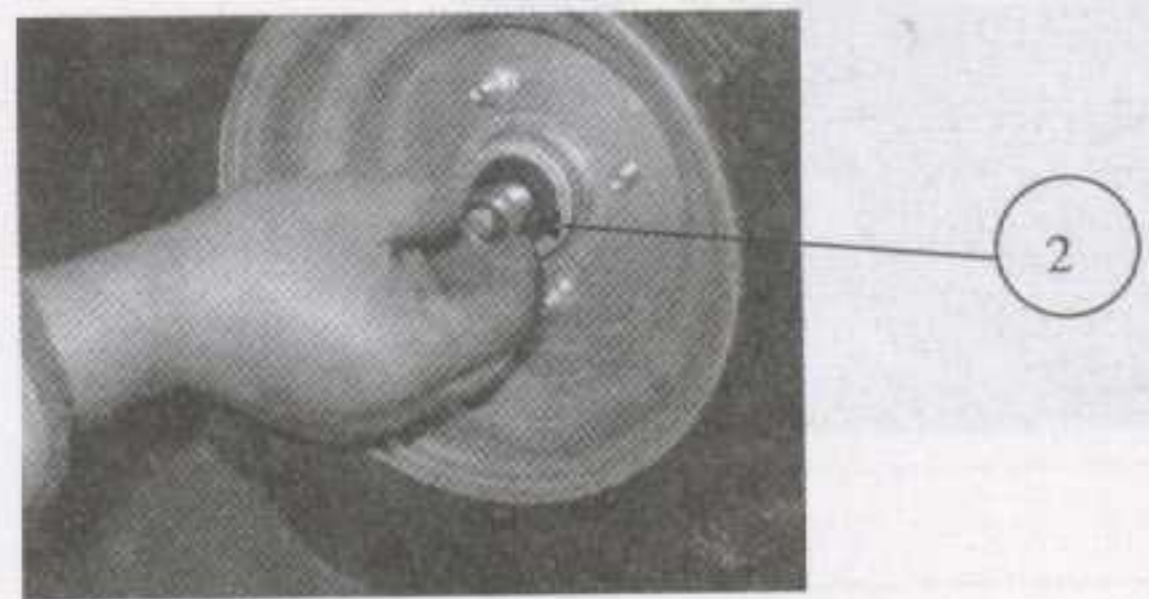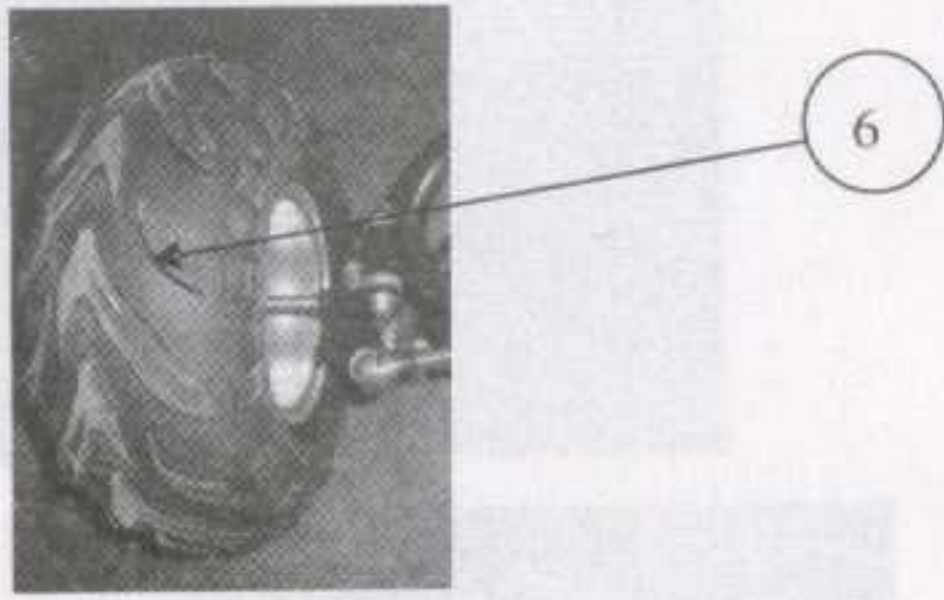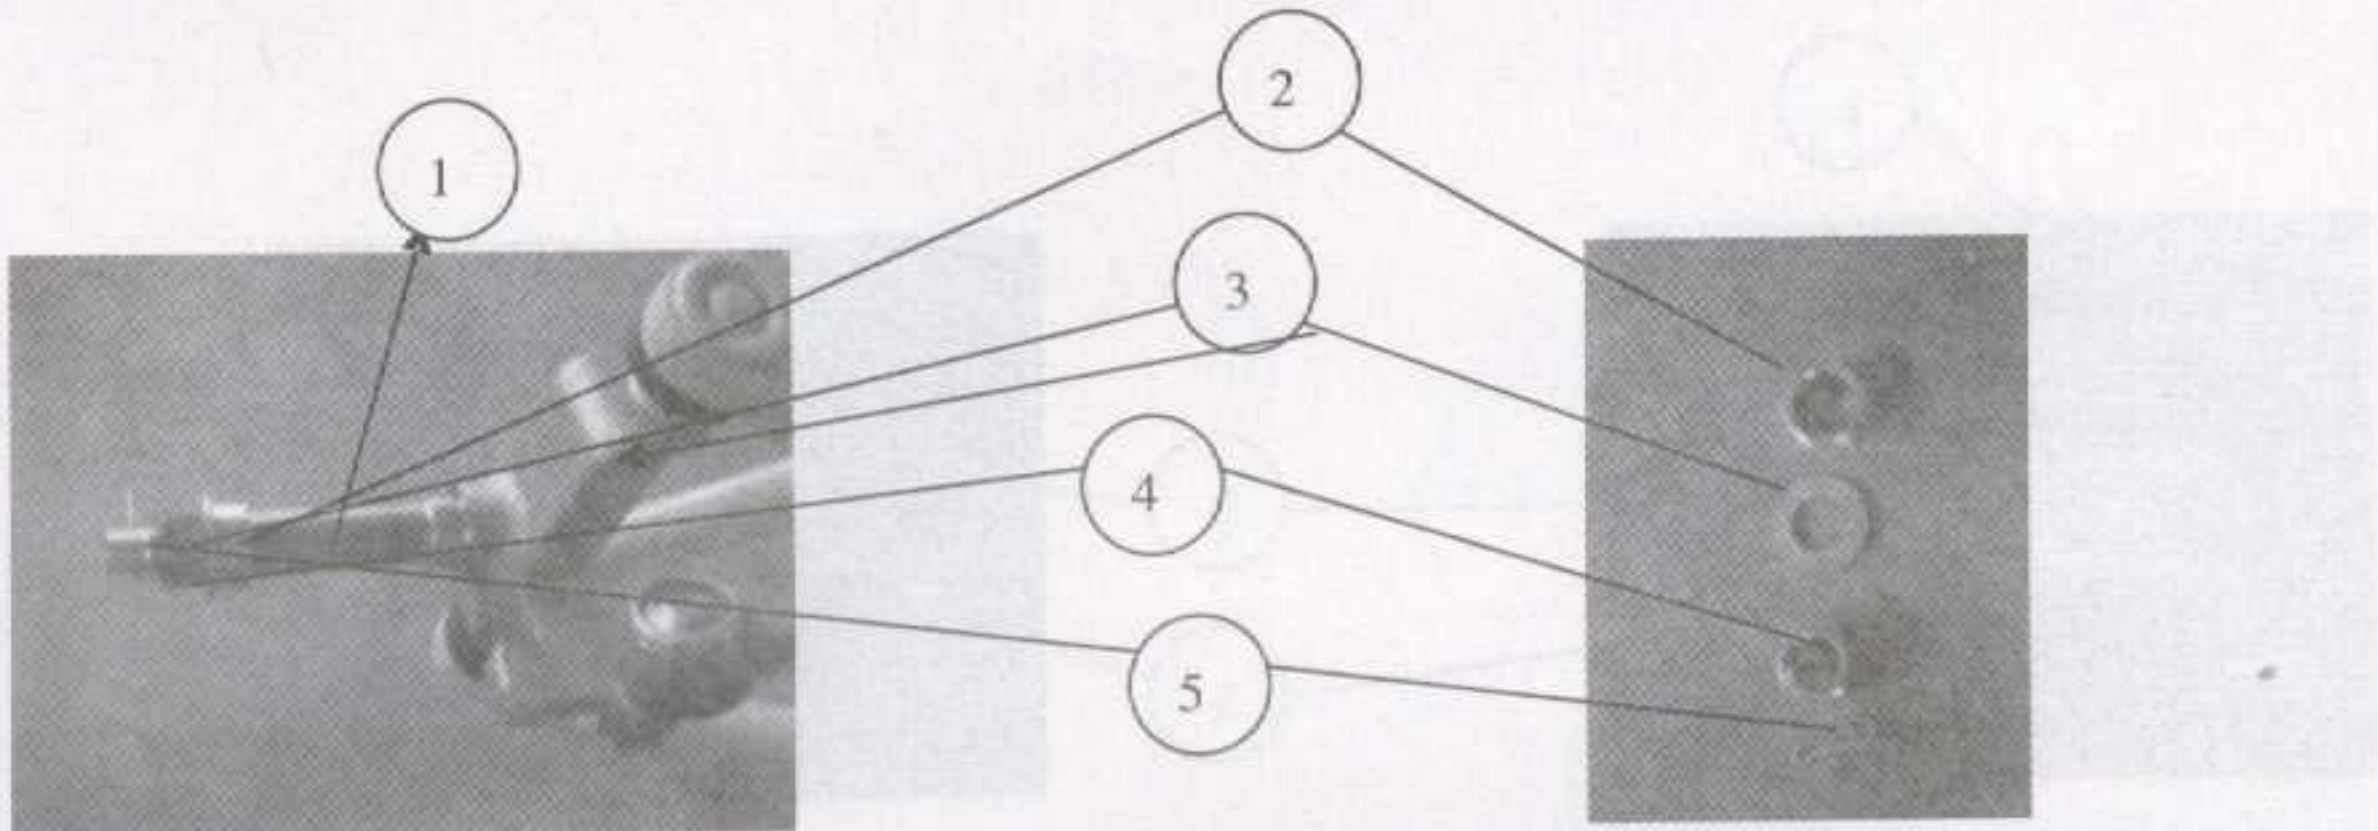

NO	DESCRIPTION	SIZE	REMARK
1	TRIFURCATE SHAFT		On the bike
2	SPACER		On 1
3	PLANE WASHER		On 1
4	HEX CONCAVE NUT	M14	On 1
5	SPLIT PIN	2mm	On 1
6	FRONT WHEEL		On the bike

- 1 Take off 2.3.4.5 from 1
- 2 Put 6 in 1. make sure 6 insert 1, as PIC 1
- 3 Put 7 in 1, then fix 2.3, use 4 lock it, the last, use 5 insert it,
- 4 The same operate of front and right.

STEP 3: FIX THE FRONT BUMPER

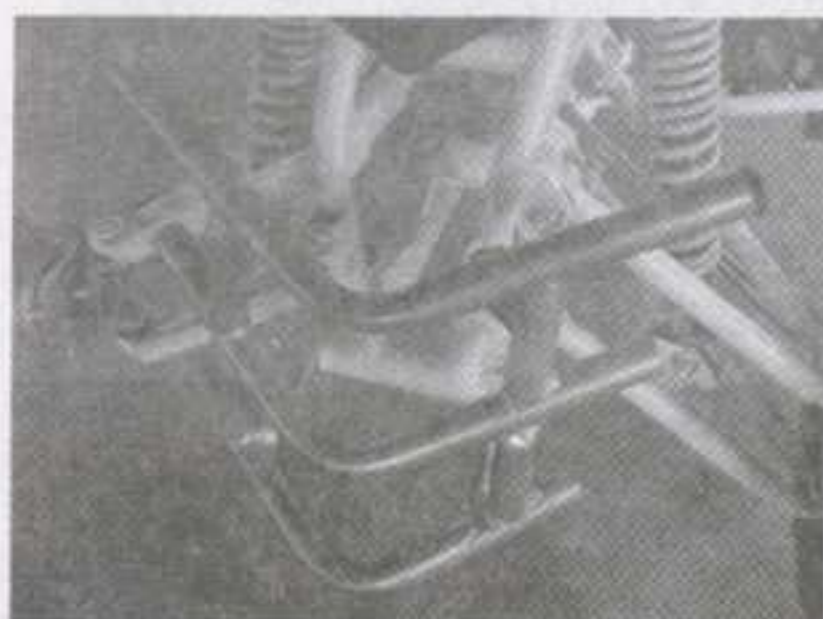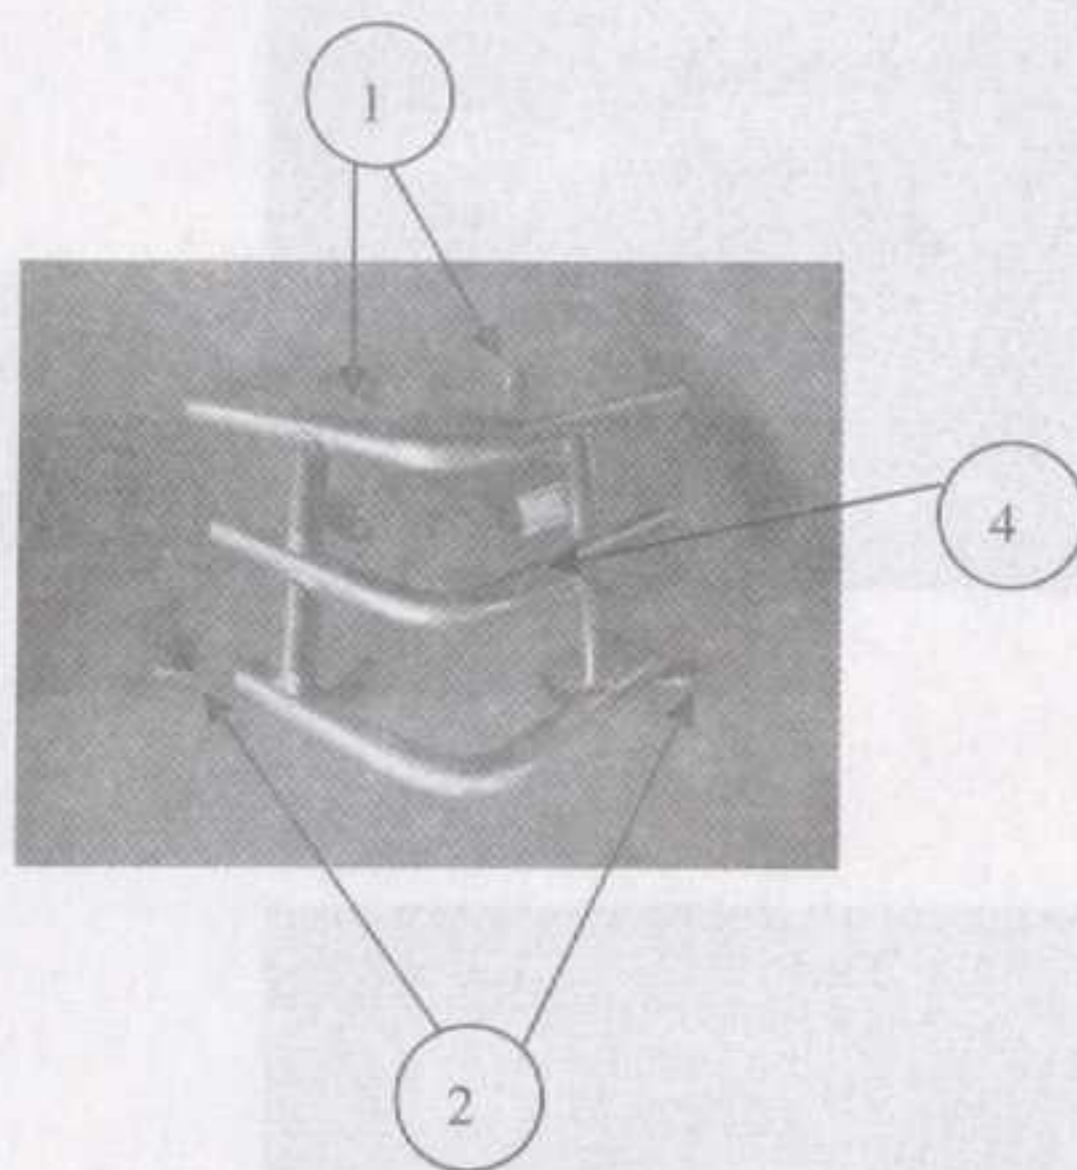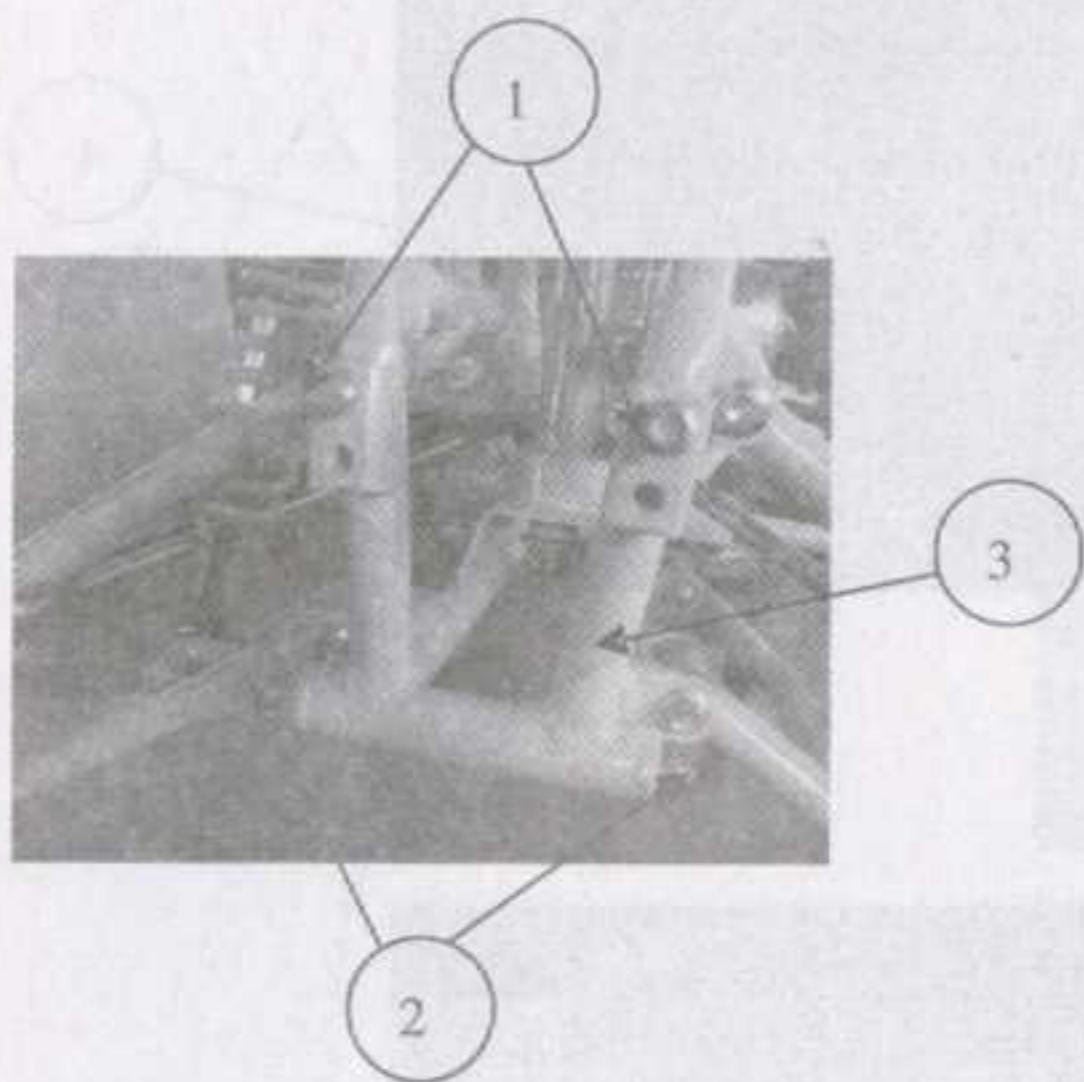





PIC 1

NO	DESCRIPTION	SIZE	REMARK
1	FRANGE SCREW	*M8*16(2pcs)	On the bike
2	FRANGE SCREW	*M8*16(2pcs)	On the bike
3	FRAME		On the bike
4	FRONT BUMPER		On the bike

1.Take out 1 and 2 from 3

2.Fix 4 on 3 with 1 and 2,then lock it

STEP 4:FIX THE BATTERY

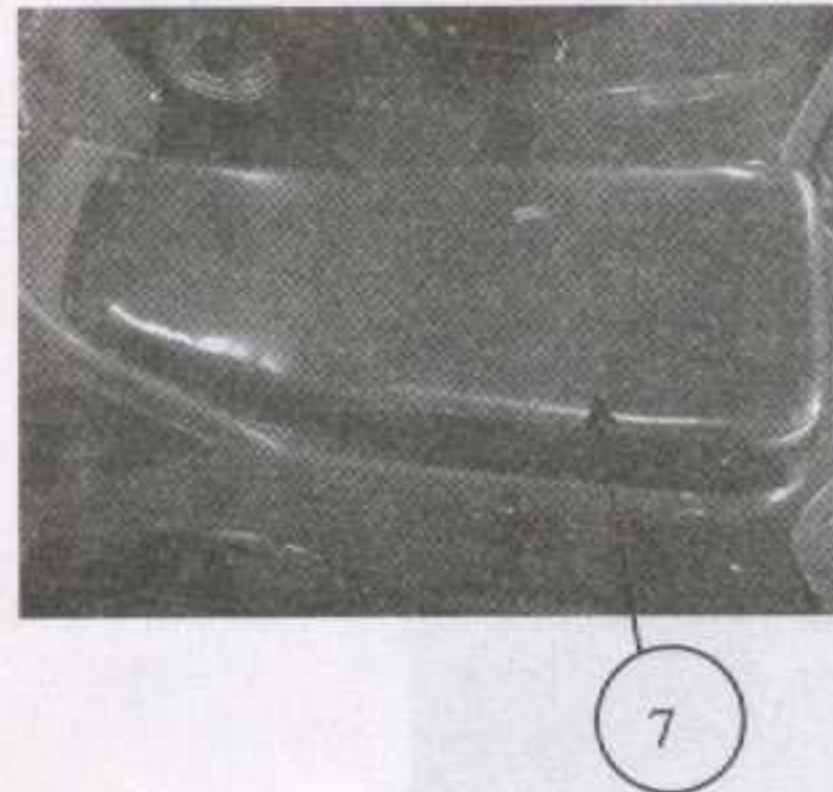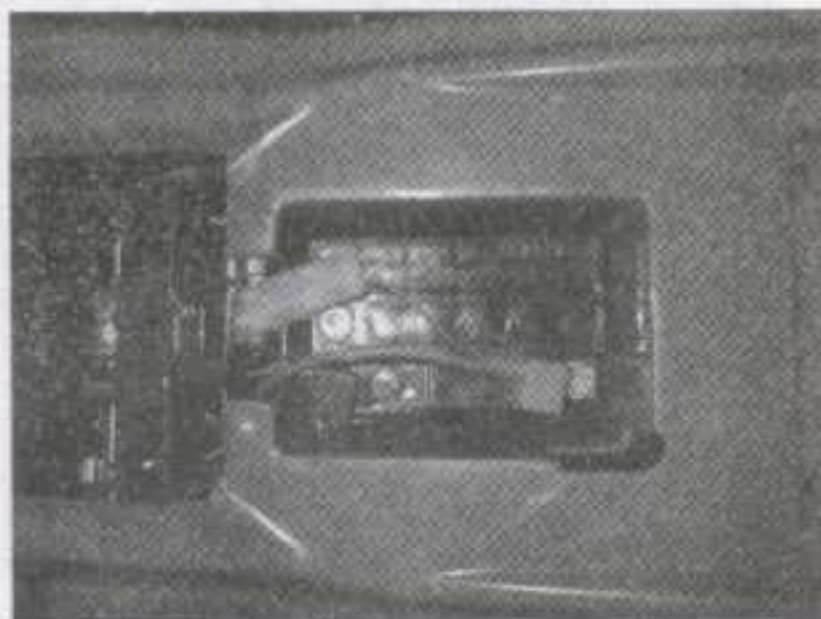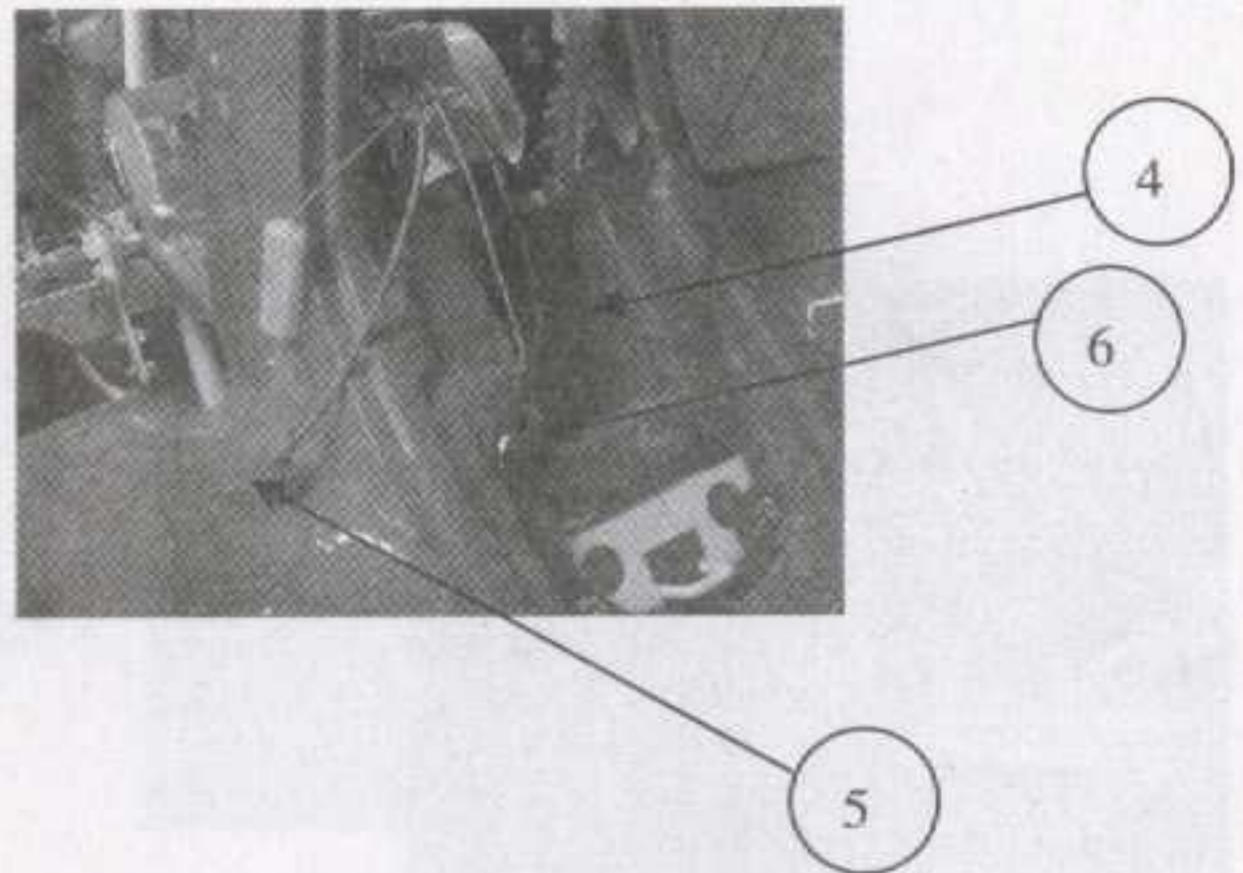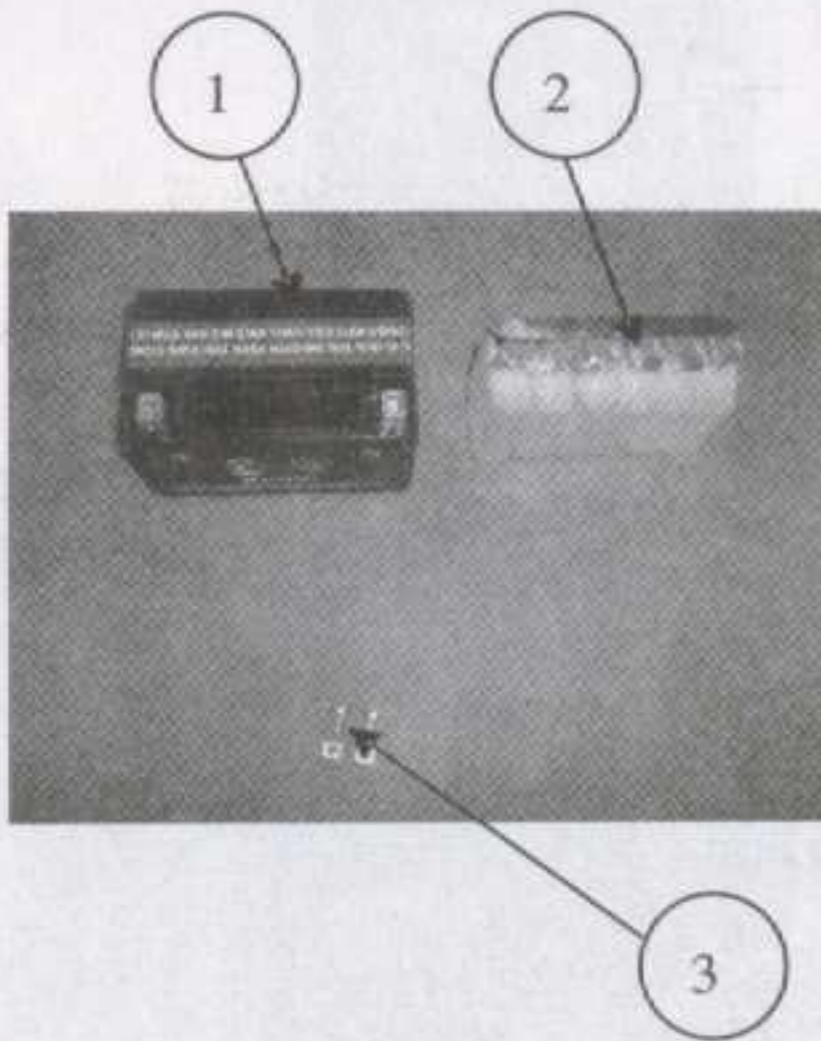


PIC 1

7

NO	DESCRIPTION	SIZE	REMARK
1	Battery		In the box
2	Battery electric liquid		In the box
3	Battery screw	2pcs	In the box
4	Battery seat		On the bike
5	Red line(+)		On the bike
6	Black line(-)		On the bike
7	Seat		On the bike

1. Fill 2 in 1 follow the electric liquid, please according to the user manual in the battery box
2. Put 1 into 4
3. Connect 5 and 6 with 1 used 3.
ATTENTION: make sure the red wire connect with +, and the black wire with -, as PIC 1
4. Put 7 on the bike

STEP 5: FIX THE PROTECT OF DISC BRAKE

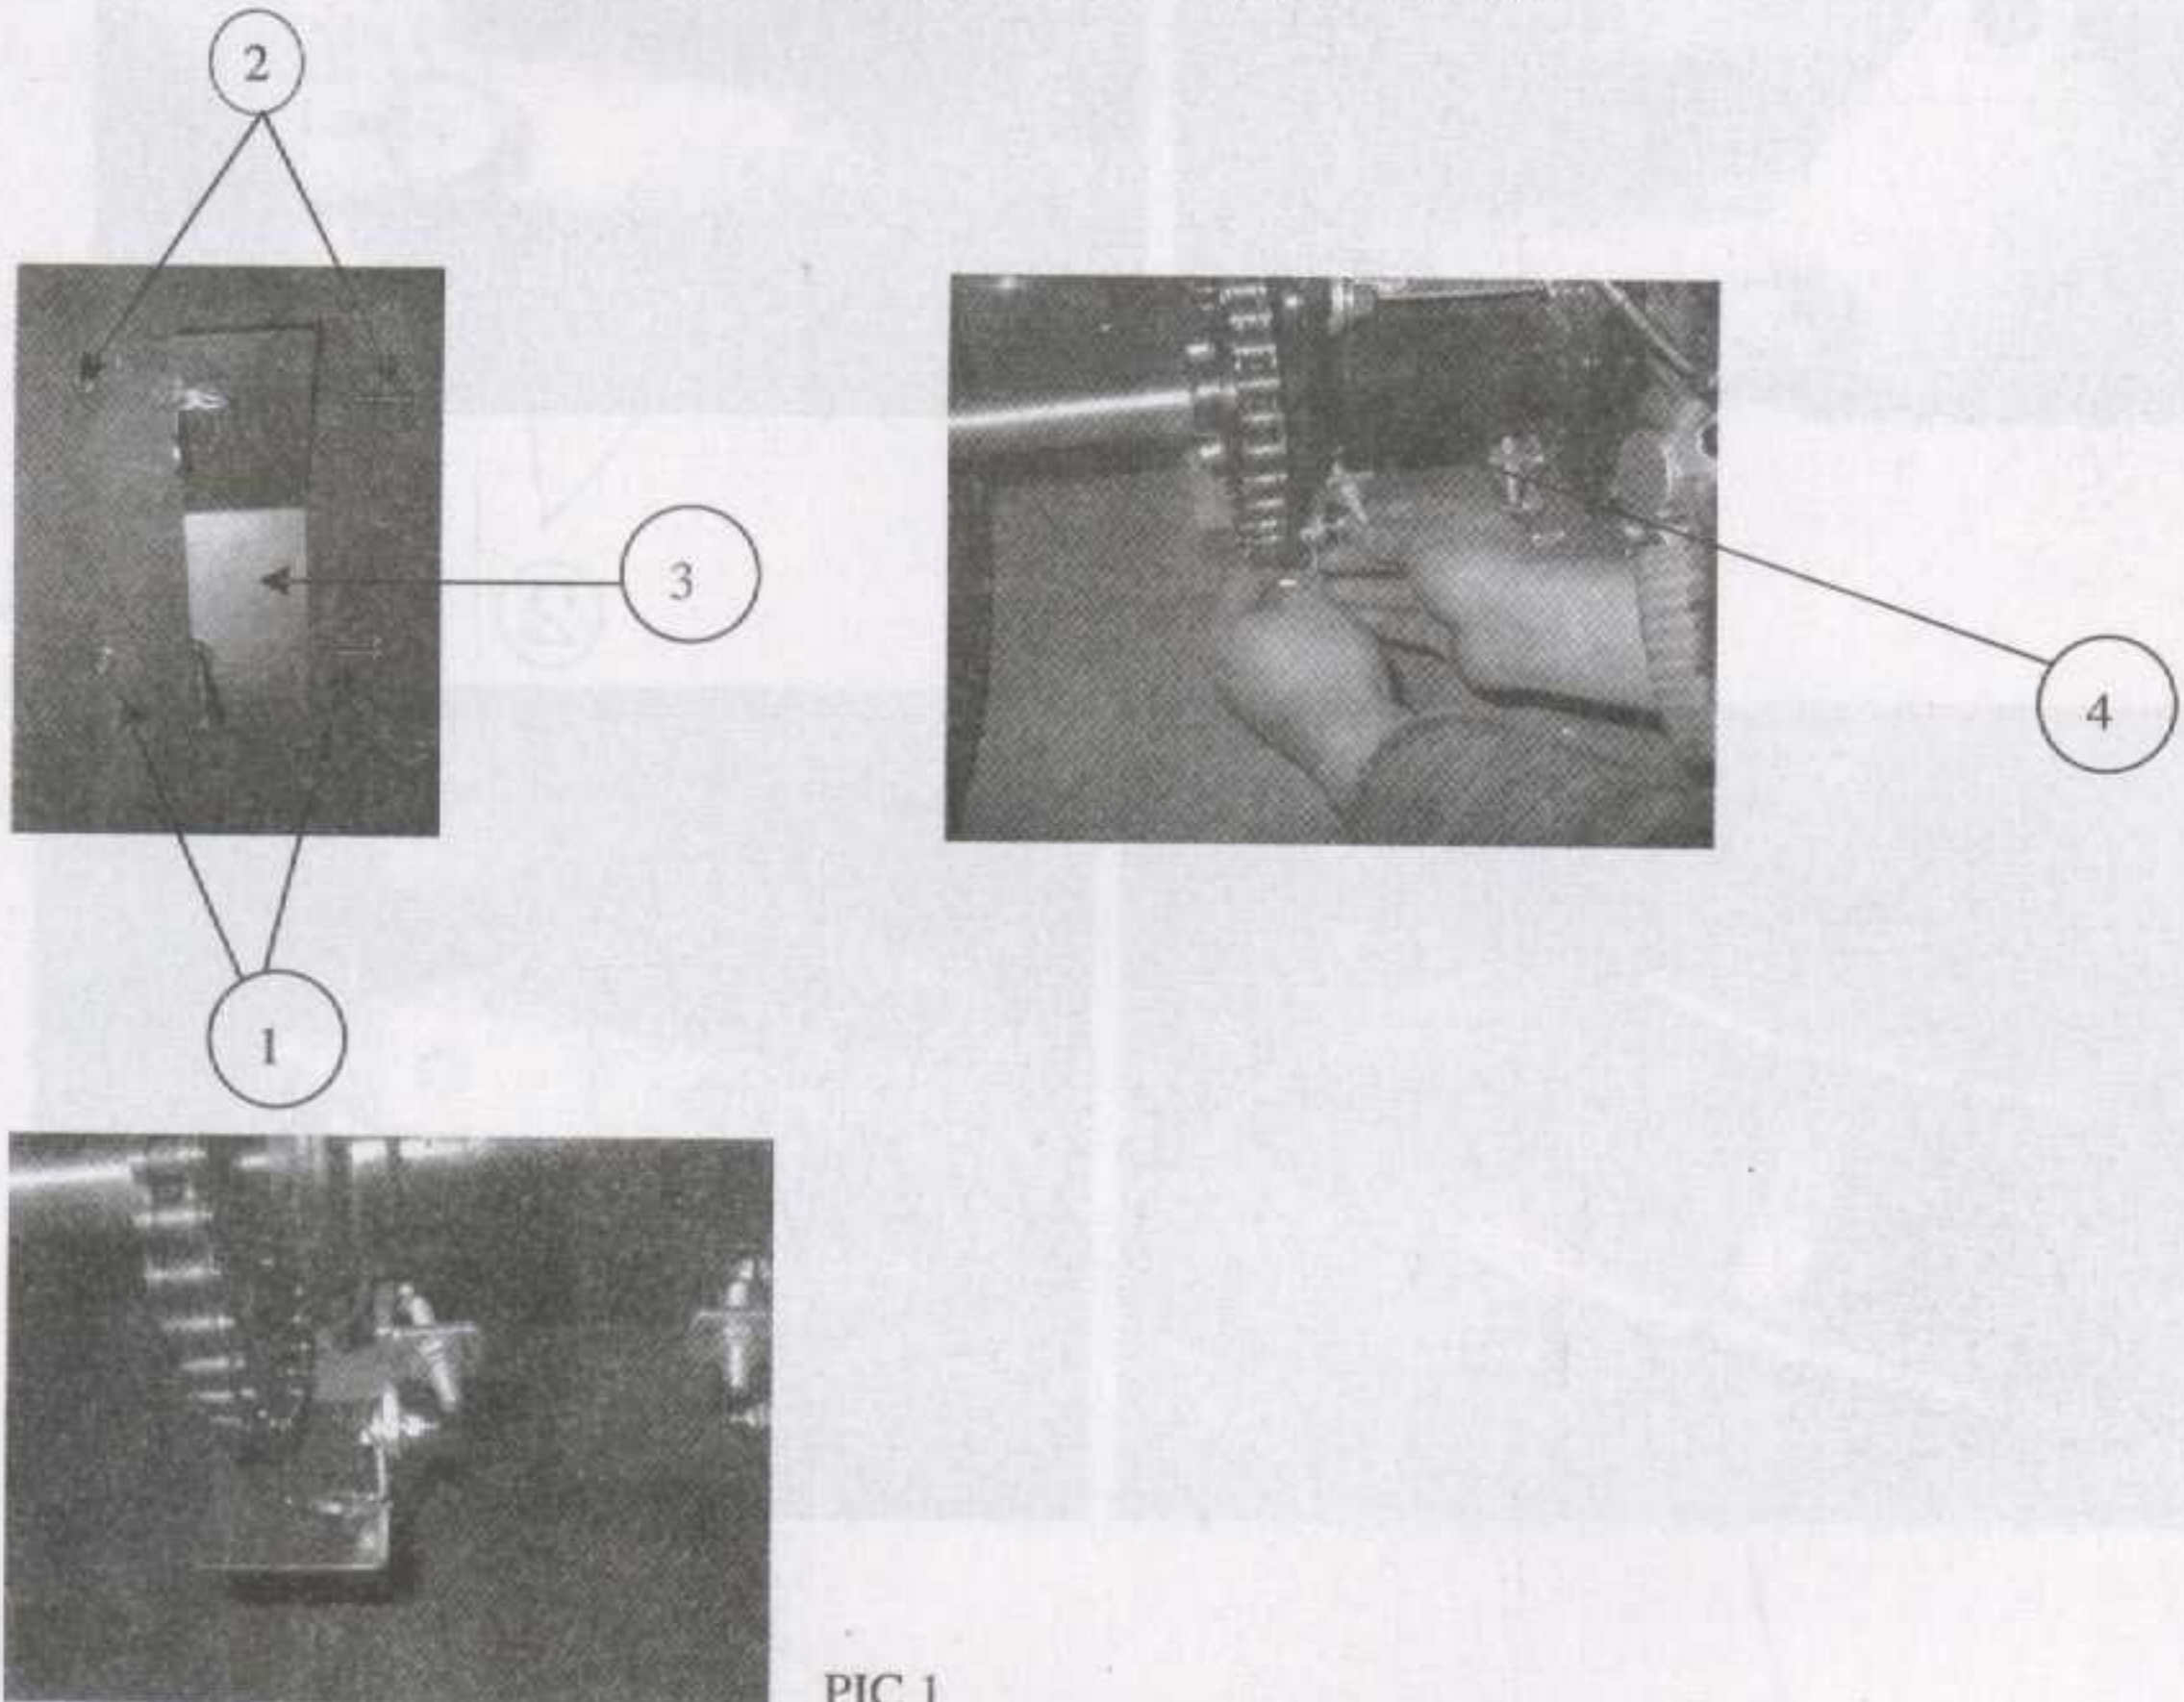

PIC 1


NO	DESCRIPTION	SIZE	REMARK
1	Screw	M8*20	
2	Screw	M6*20	
3	WHEEL CHAIN PROTECT		On the bike
4	FORK		On the bike

1. Use 1 get through 3 and fix on 4, as PIC 1
 The same operate of 2


STEP 5: FIX THE REAR BUNPER ON THE REAR OF MAIN FRAME




①

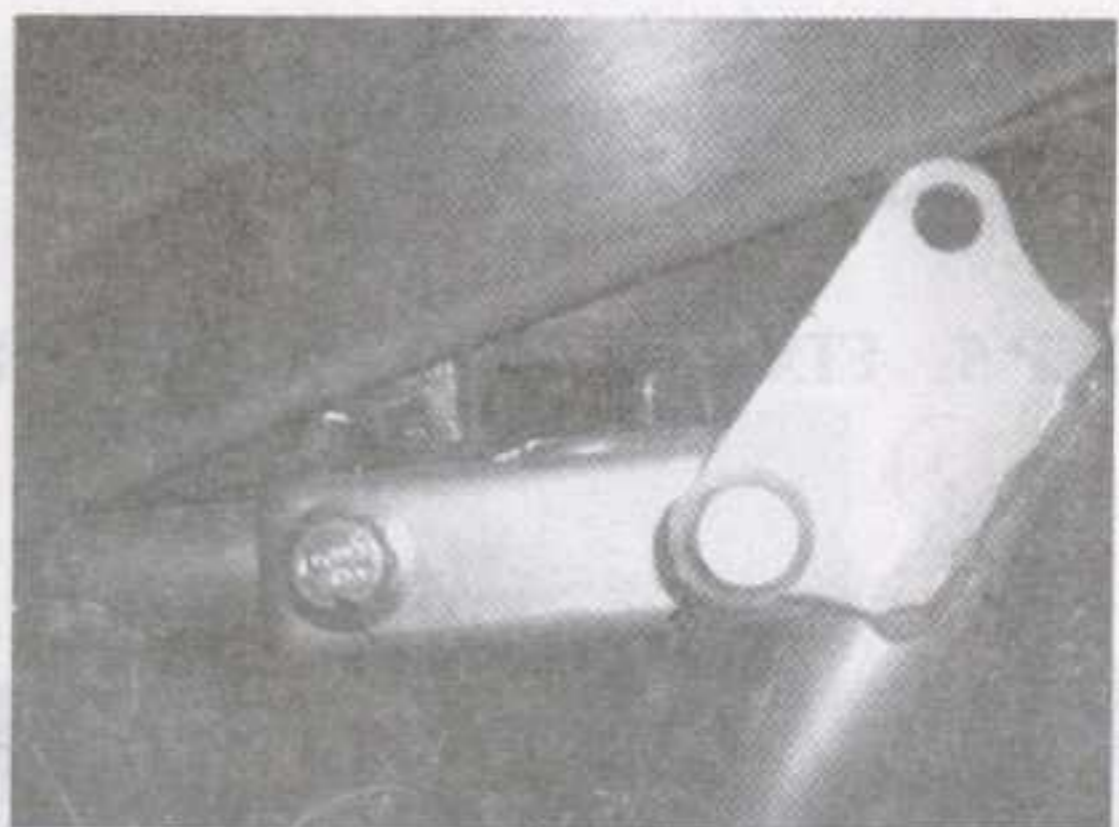


②

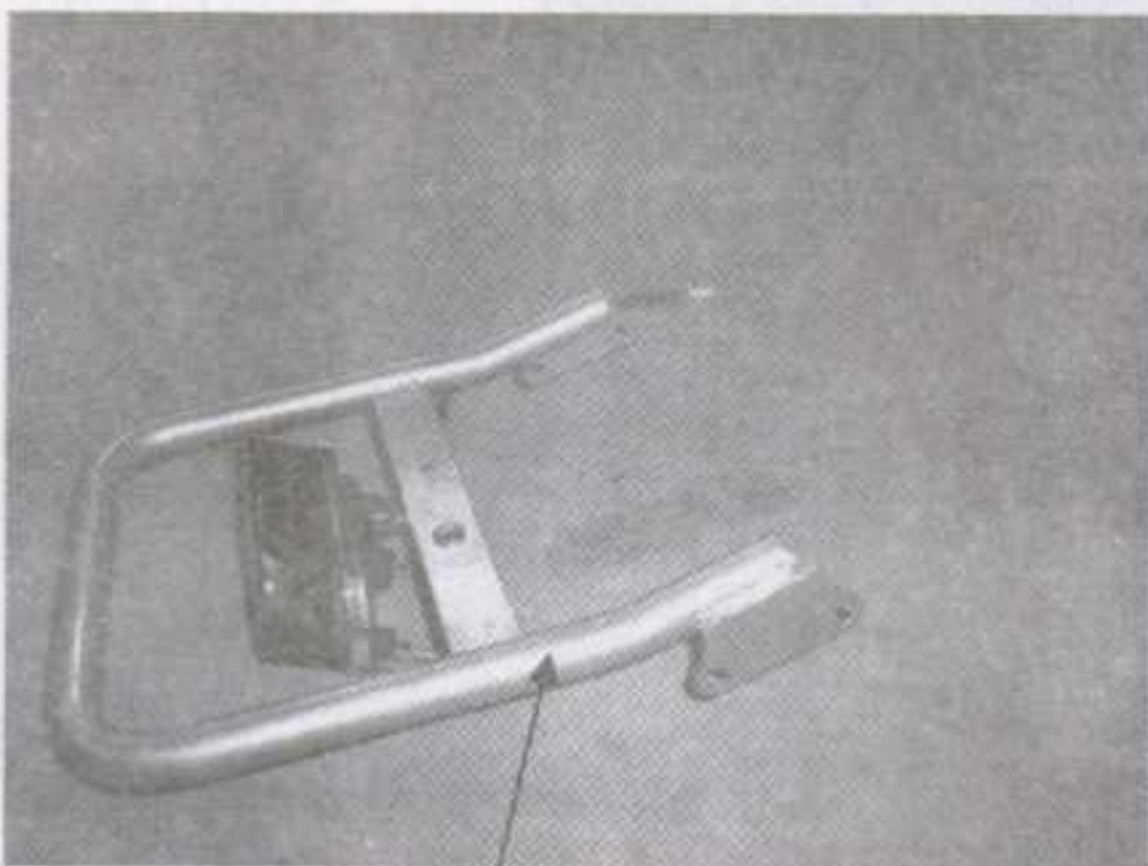

③

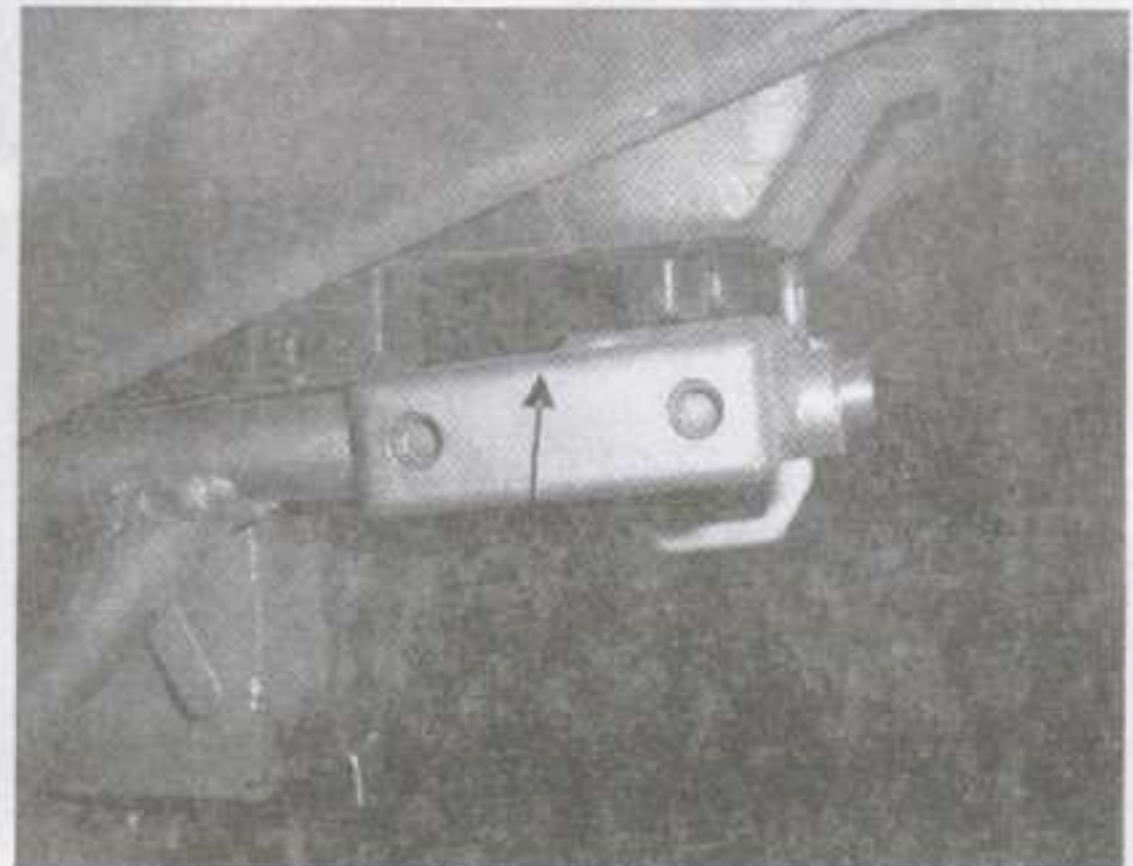

④

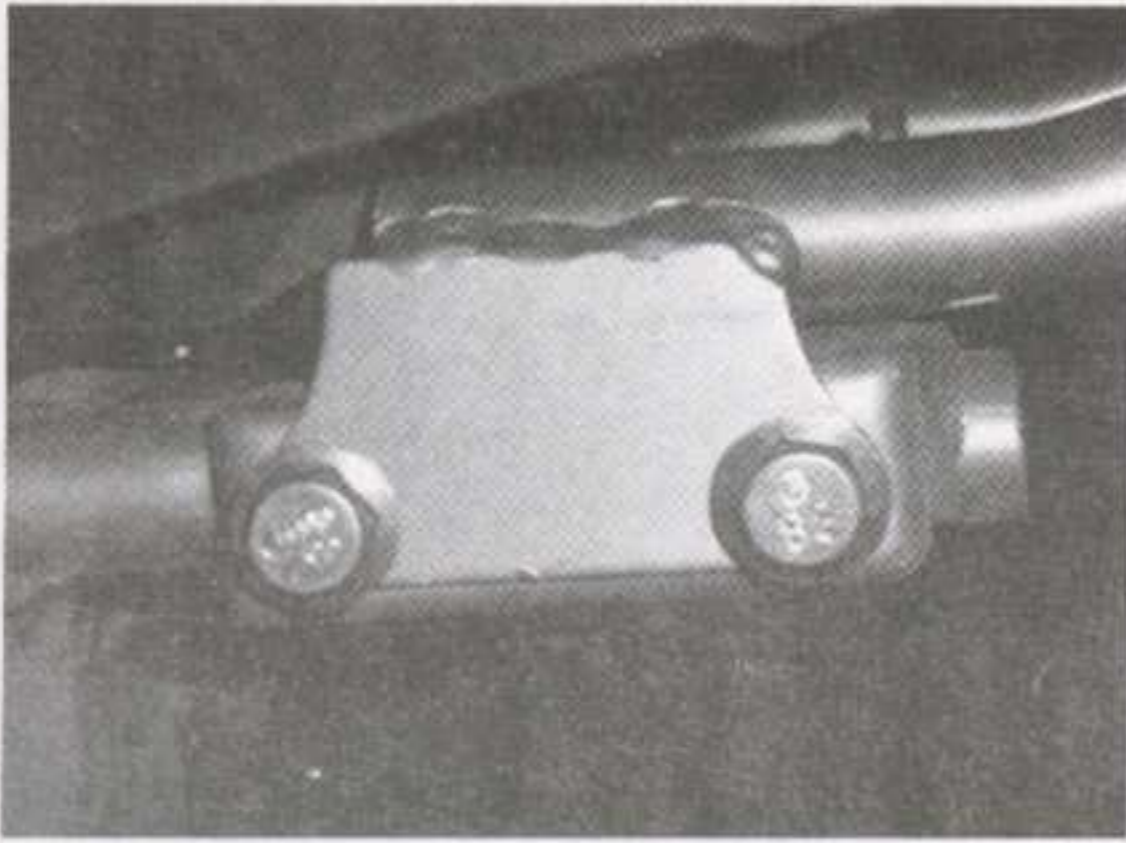

PIC 1

NO	DESCRIPTION	SIZE	REMARK
1	HEX FLANGE BOLT	M10*20	
2	HEX FLANGE BOLT	M10*20	
3	REAR BUNPER		On the rear of main fram
4	MAIN FRAME		On the rear of main fram

1. unload 1 and 2.
2. Use 1,2 get throught 3 and fix on 4,as PIC 1